

PANEL DESIGNS



*Ribbed and Flush Panels Available on Distinct 300 and Enduring 300 Only.

COLOR OPTIONS





SPECIFICATIONS'

INSULATION1

POLYSTYRENE

(200 & 300 only)

R-VALUE

6.64

(Distinct/Enduring 200)

D V/ALLIE

6.48

(Distinct 300)

R-VALUE²

9.05

(Enduring 300)

DOOR THICKNESS

(100 & 200)

1-3/8"

STEEL

25 ga

(Distinct 100/200)

STEEL THICKNESS

24 ga

(Enduring 100/200

STEEL THICKNESS

27/27 ga

(Distinct 300)

STEEL

24/27 ga

(Enduring 300

WIND LOAD AVAILABLE³



(All mode

PAINT FINISH WARRANTY⁴

_IFETIME


Distinct 300, Al Endurina Model HARDWARE

LIFETIME

(Distinct 300, Endurina 300)

WINDOW OPTIONS

WINDOW INSERTS - Short Panel

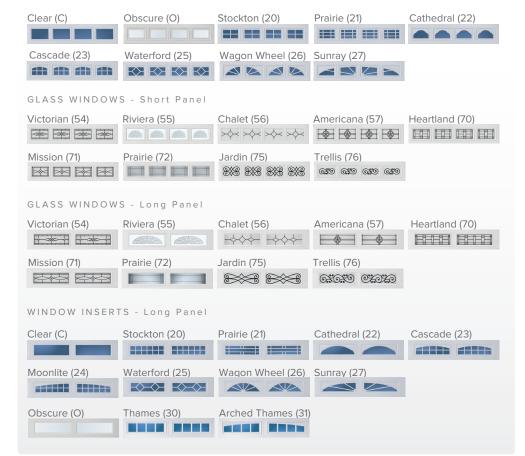

CONSTRUCTION

PRECISION 100



- One-layer: steel
- Durable, reliable, low-maintenance

PRECISION 200



- Two-layer: steel
 - + insulation
- Durable, reliable, low-maintenance
- Environmentally safe polystyrene thermal insulation with vinyl backing
- Energy efficient and quiet operation

PRECISION 300



- Three-layer: steel + insulation + steel
- Durable, reliable, low- maintenance
- Environmentally safe polystyrene thermal insulation with steel backing
- Superior energy efficiency
- Ultra-quiet operation

¹All insulation has passed fire safety testing.

² Calculated door section R-value is in accordance with DASMA TDS-163

³ It is your responsibility to make sure your garage door meets local building codes.

⁴ For complete warranty details, contact your local Precision Door Service franchise.

All modulation has passed me surely testing.